

# Selection of Techniques and Metrics

Raj Jain

Washington University in Saint Louis

Saint Louis, MO 63130

Jain@cse.wustl.edu

These slides are available on-line at:

<http://www.cse.wustl.edu/~jain/cse567-17/>



- ❑ Criteria for Selecting an Evaluation Technique
- ❑ Three Rules of Validation
- ❑ Selecting Performance Metrics
- ❑ Commonly Used Performance Metrics
- ❑ Utility Classification of Metrics
- ❑ Setting Performance Requirements

# Criteria for Selecting an Evaluation Technique


Criterion	Analytical		
	Modeling	Simulation	Measurement
1. Stage	Any	Any	Postprototype
2. Time required	Small	Medium	Varies
3. Tools	Analysts	Computer languages	Instrumentation
4. Accuracy <sup>a</sup>	Low	Moderate	Varies
5. Trade-off evaluation	Easy	Moderate	Difficult
6. Cost	Small	Medium	High
7. Saleability	Low	Medium	High

<sup>a</sup> In all cases, result may be misleading or wrong.

# Three Rules of Validation

- ❑ Do not trust the results of a **simulation model** until they have been validated by analytical modeling or measurements.
- ❑ Do not trust the results of an **analytical model** until they have been validated by a simulation model or measurements.
- ❑ Do not trust the results of a **measurement** until they have been validated by simulation or analytical modeling.

# Selecting Performance Metrics

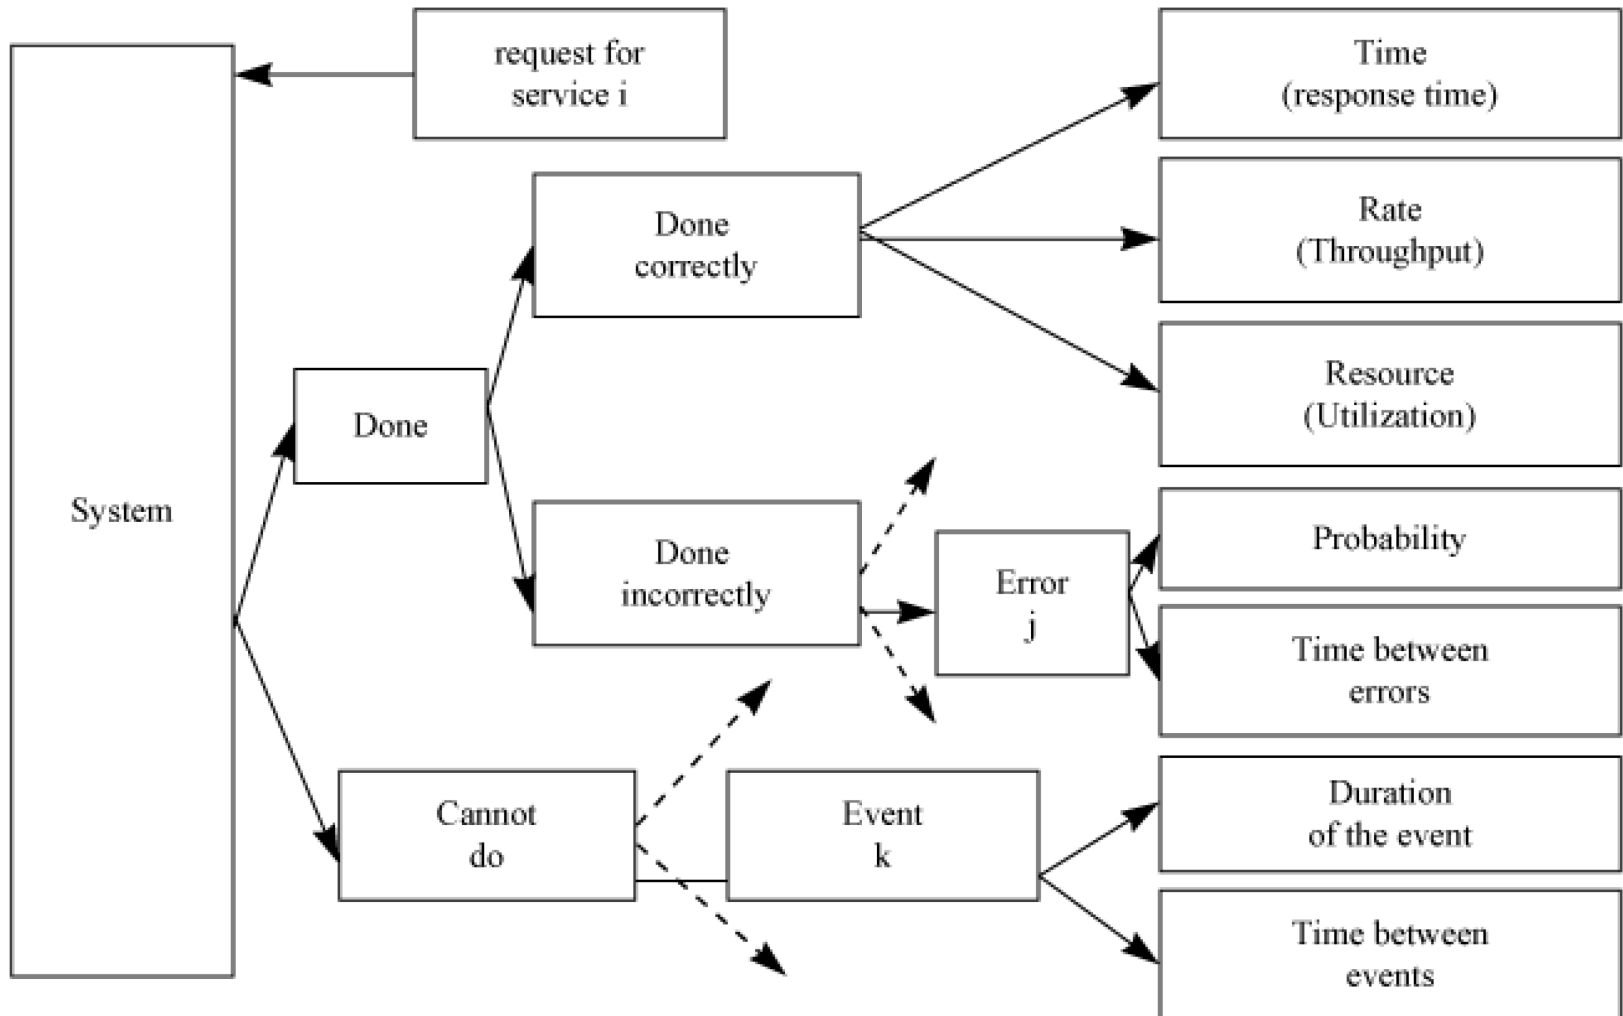

# Selecting Metrics

- ❑ Include:
  - Performance Time, Rate, Resource
  - Error rate, probability
  - Time to failure and duration
- ❑ Consider including:
  - Mean and variance
  - Individual and Global
- ❑ Selection Criteria:
  - Low-variability
  - Non-redundancy
  - Completeness

## Case Study: Two Congestion Control Algorithms

- ❑ Service: Send packets from specified source to specified destination in order.
- ❑ Possible outcomes:
  - Some packets are delivered in order to the correct destination.
  - Some packets are delivered out-of-order to the destination.
  - Some packets are delivered more than once (duplicates).
  - Some packets are dropped on the way (lost packets).

# Case Study (Cont)

- ❑ Performance: For packets delivered in order,
  - Time-rate-resource  $\Rightarrow$ 
    - ❑ Response time to deliver the packets
    - ❑ Throughput: the number of packets per unit of time.
    - ❑ Processor time per packet on the source end system.
    - ❑ Processor time per packet on the destination end systems.
    - ❑ Processor time per packet on the intermediate systems.
  - Variability of the response time  $\Rightarrow$  Retransmissions
    - ❑ Response time: the delay inside the network



## Case Study (Cont)

- Out-of-order packets consume buffers  
⇒ Probability of out-of-order arrivals.
- Duplicate packets consume the network resources  
⇒ Probability of duplicate packets
- Lost packets require retransmission  
⇒ Probability of lost packets
- Too much loss cause disconnection  
⇒ Probability of disconnect

# Case Study (Cont)

- Shared Resource  $\Rightarrow$  Fairness

$$f(x_1, x_2, \dots, x_n) = \frac{(\sum_{i=1}^n x_i)^2}{n \sum_{i=1}^n x_i^2}$$

- Fairness Index Properties:
  - Always lies between 0 and 1.
  - Equal throughput  $\Rightarrow$  Fairness = 1.
  - If  $k$  of  $n$  receive  $x$  and  $n-k$  users receive zero throughput: the fairness index is  $k/n$ .

## Case Study (Cont)


- Throughput and delay were found redundant ⇒ Use Power.

$$\text{Power} = \frac{\text{Throughput}}{\text{Response Time}}$$


- Variance in response time redundant with the probability of duplication and the probability of disconnection
- Total nine metrics.

# Commonly Used Performance Metrics



## □ Response time and Reaction time

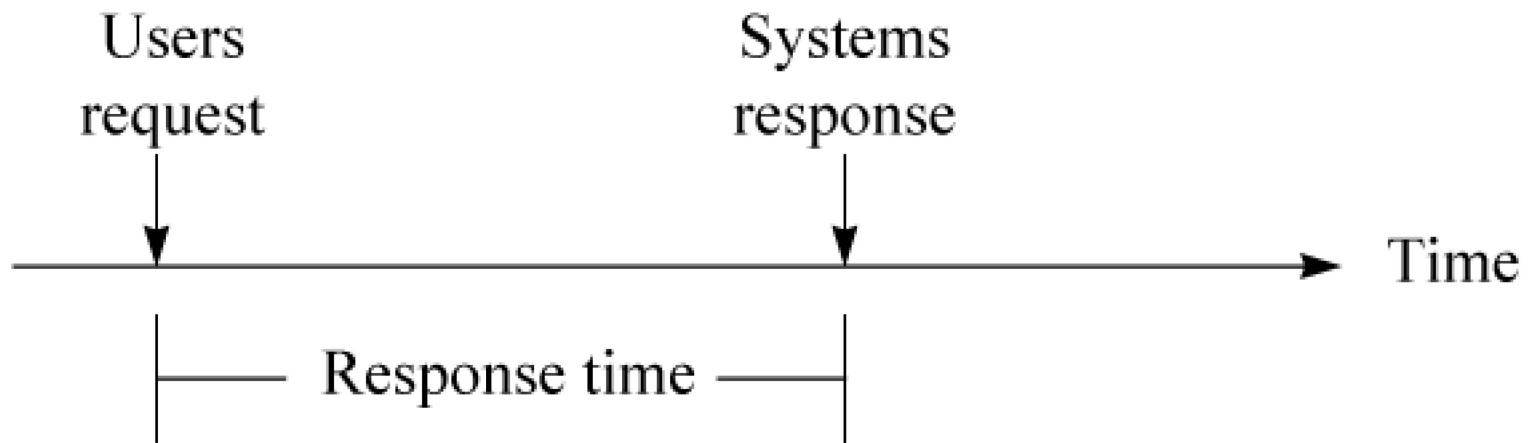

# Response Time (Cont)

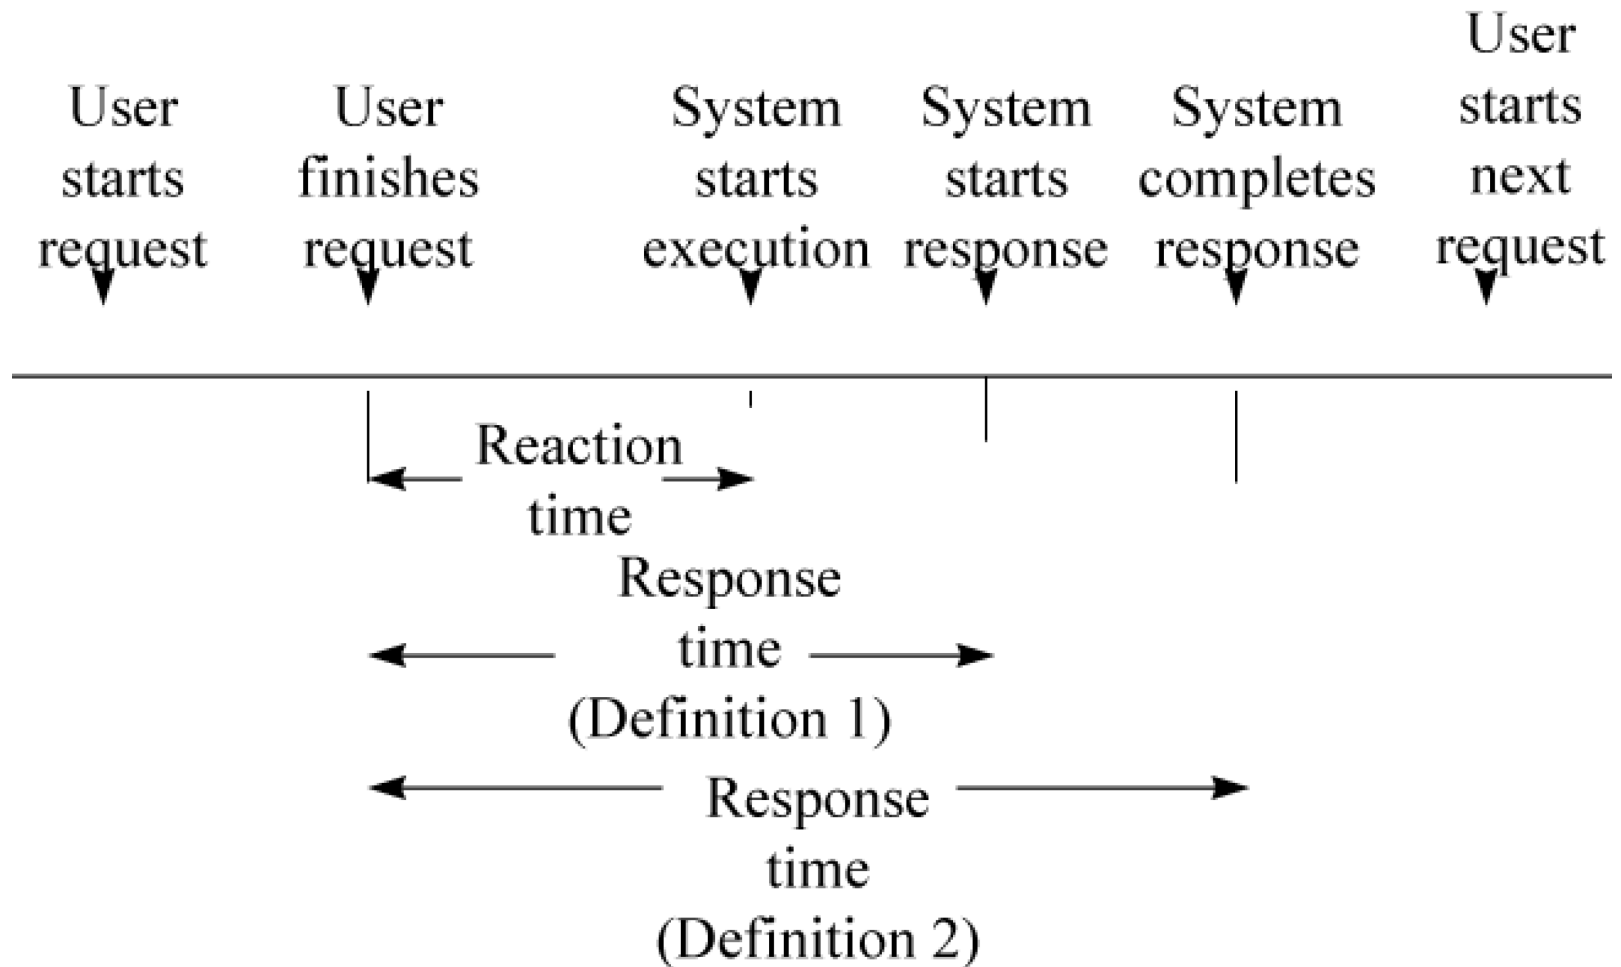

# Capacity

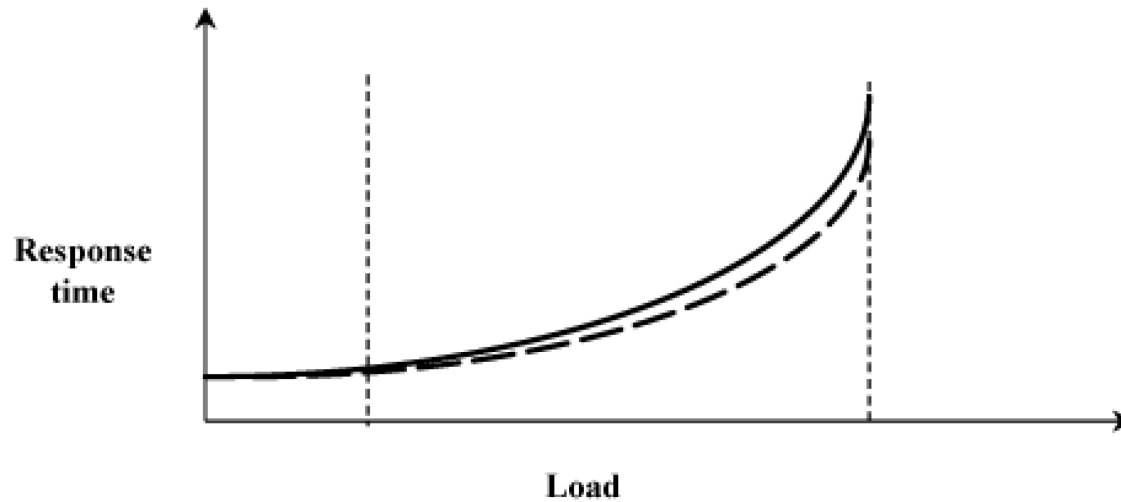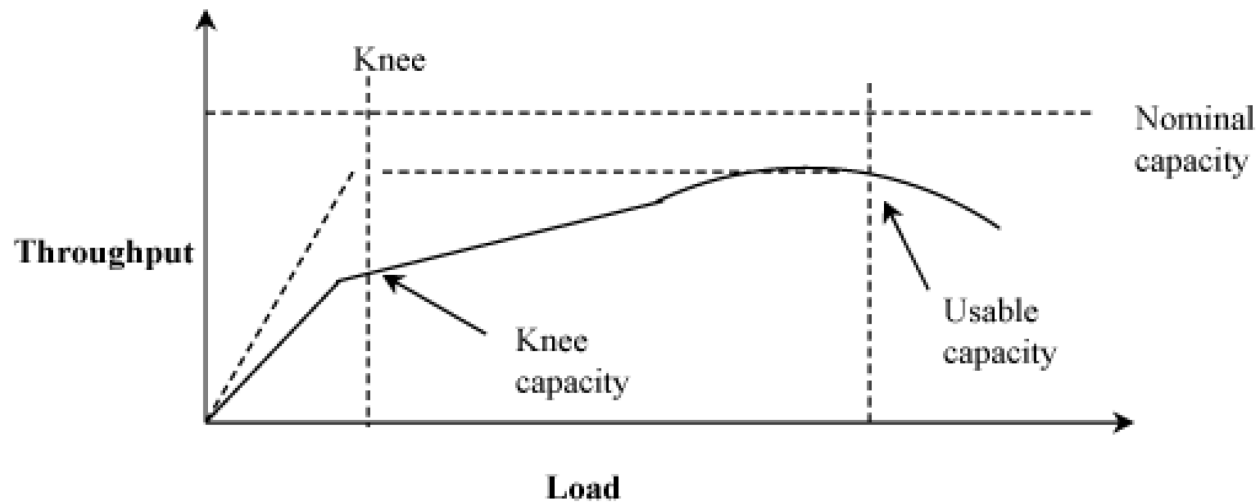

## Common Performance Metrics (Cont)

- ❑ **Nominal Capacity:** Maximum achievable throughput under ideal workload conditions. E.g., bandwidth in bits per second. The response time at maximum throughput is too high.
- ❑ **Usable capacity:** Maximum throughput achievable without exceeding a pre-specified response-time limit
- ❑ **Knee Capacity:** Knee = Low response time and High throughput


# Common Performance Metrics (Cont)

- ❑ **Turnaround time** = the time between the submission of a batch job and the completion of its output.
- ❑ **Stretch Factor**: The ratio of the response time with multiprogramming to that without multiprogramming.
- ❑ **Throughput**: Rate (requests per unit of time) Examples:
  - Jobs per second
  - Requests per second
  - Millions of Instructions Per Second (MIPS)
  - Millions of Floating Point Operations Per Second (MFLOPS)
  - Packets Per Second (PPS)
  - Bits per second (bps)
  - Transactions Per Second (TPS)



# Common Performance Metrics (Cont)

- ❑ **Efficiency**: Ratio usable capacity to nominal capacity. Or, the ratio of the performance of an  $n$ -processor system to that of a one-processor system is its efficiency.
- ❑ **Utilization**: The fraction of time the resource is busy servicing requests. Average fraction used for memory.

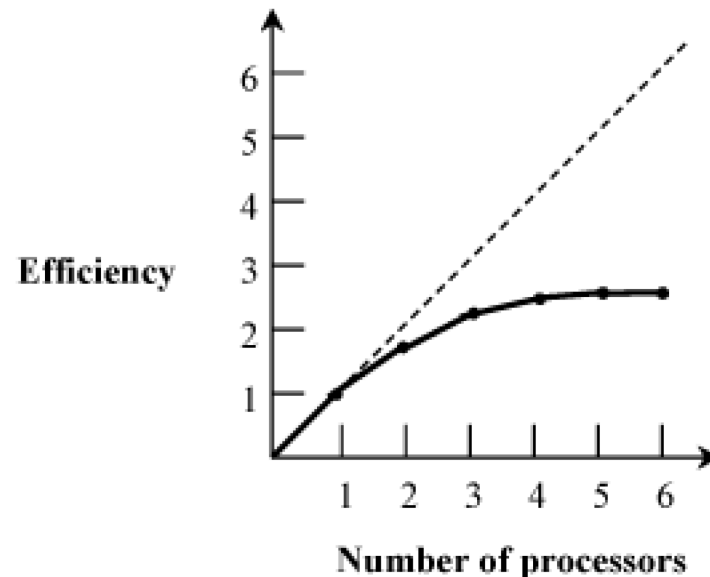

# Common Performance Metrics (Cont)


## □ Reliability:

- Probability of errors
- Mean time between errors (error-free seconds).

## □ Availability:

- Mean Time to Failure (MTTF)
- Mean Time to Repair (MTTR)
- $MTTF / (MTTF + MTTR)$

# Utility Classification of Metrics

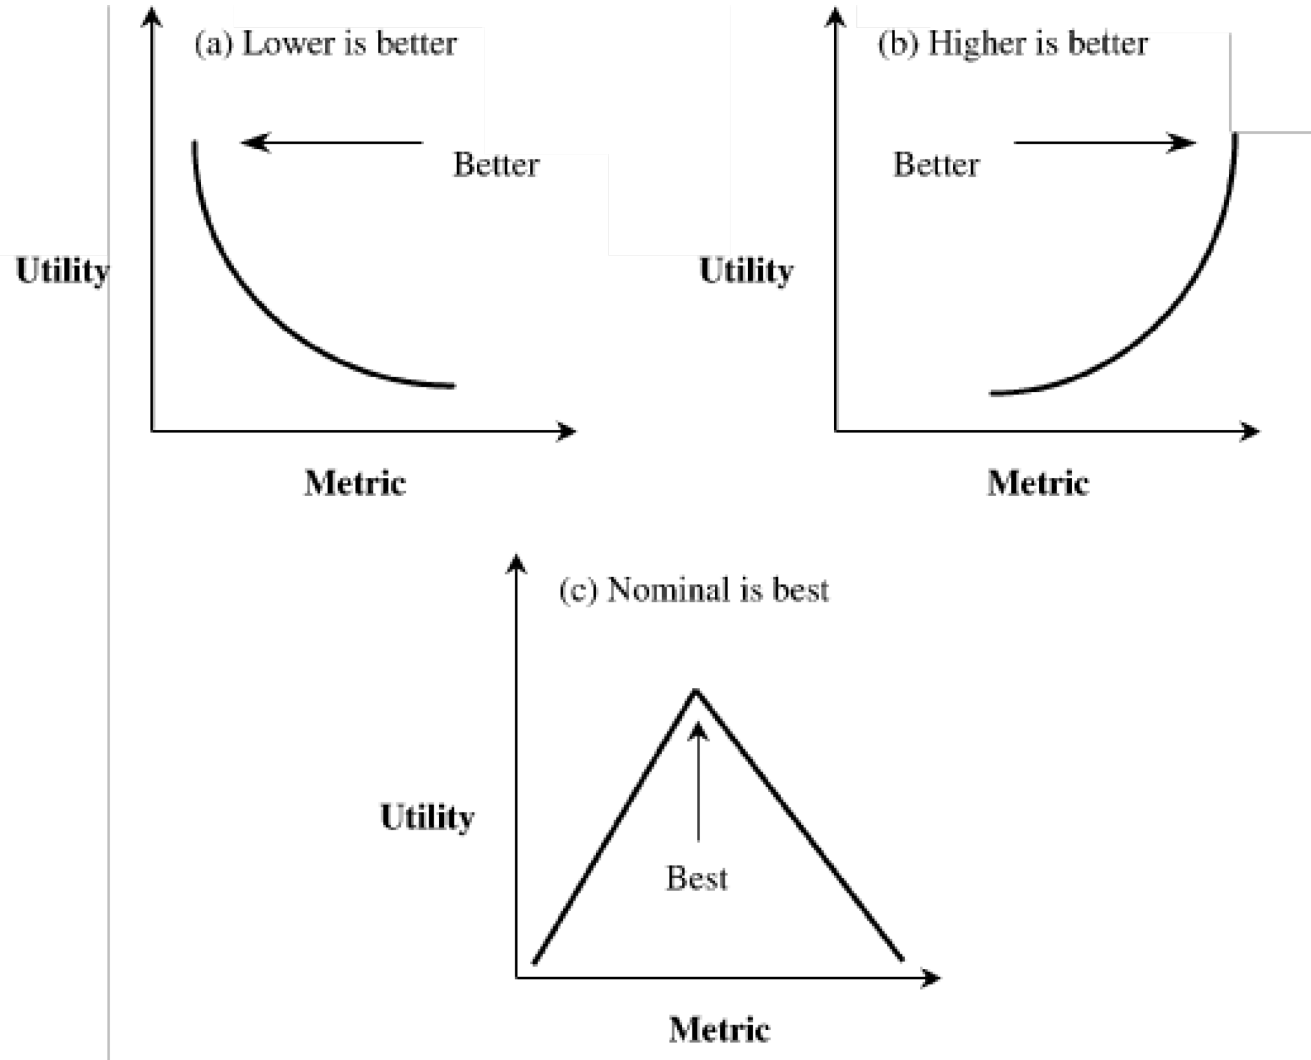

# Setting Performance Requirements

## □ Examples:

- “ The system should be both processing and memory efficient. It should not create excessive overhead”
- “ There should be an extremely low probability that the network will duplicate a packet, deliver a packet to the wrong destination, or change the data in a packet.”

## □ Problems:

Non-Specific

Non-Measurable

Non-Acceptable

Non-Realizable

Non-Thorough

⇒ SMART

# Case Study 3.2: Local Area Networks


- ❑ **Service:** Send frame to D
- ❑ **Outcomes:**
  - Frame is correctly delivered to D
  - Incorrectly delivered
  - Not delivered at all
- ❑ **Requirements:**
- ❑ **Speed**
  - The access delay at any station should be less than one second.
  - Sustained throughput must be at least 80 Mbits/sec.
- ❑ **Reliability:** Five different error modes.
  - Different amount of damage
  - Different level of acceptability.

## Case Study (Cont)

- The probability of any bit being in error must be less than  $1\text{E-}7$ .
- The probability of any frame being in error (with error indication set) must be less than 1%.
- The probability of a frame in error being delivered without error indication must be less than  $1\text{E-}15$ .
- The probability of a frame being misdelivered due to an undetected error in the destination address must be less than  $1\text{E-}18$ .
- The probability of a frame being delivered more than once (duplicate) must be less than  $1\text{E-}5$ .
- The probability of losing a frame on the LAN (due to all sorts of errors) must be less than 1%.

# Case Study (Cont)

- **Availability:** Two fault modes –  
Network reinitializations and permanent failures
  - The mean time to initialize the LAN must be less than 15 milliseconds.
  - The mean time between LAN initializations must be at least one minute.
  - The mean time to repair a LAN must be less than one hour. (LAN partitions may be operational during this period.)
  - The mean time between LAN partitioning must be at least one-half a week.

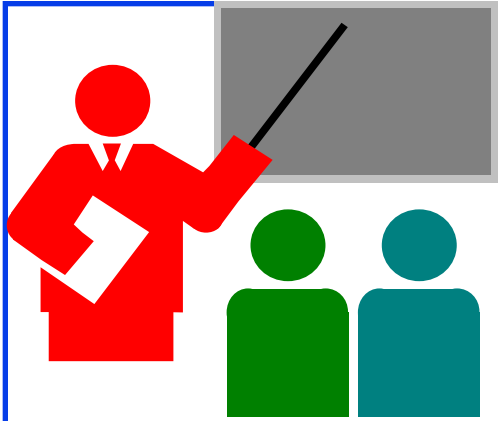

# Summary of Part I

- ❑ **Systematic Approach:** Define the system, list its services, metrics, parameters, decide factors, evaluation technique, workload, experimental design, analyze the data, and present results
- ❑ **Selecting Evaluation Technique:** The life-cycle stage is the key. Other considerations are: time available, tools available, accuracy required, trade-offs to be evaluated, cost, and saleability of results.



# Summary (Cont)

## □ **Selecting Metrics:**

- For each service list time, rate, and resource consumption
- For each undesirable outcome, measure the frequency and duration of the outcome
- Check for low-variability, non-redundancy, and completeness.

## □ **Performance requirements:** Should be SMART. Specific, measurable, acceptable, realizable, and thorough.

# Homework 3: Exercise 3.1

What methodology would you choose:

- a. To select a personal computer for yourself?
- b. To select 1000 workstations for your company?
- c. To compare two spread sheet packages?
- d. To compare two **processor** architectures (Don't exist)?

if the answer was required:

- i. Yesterday?
- ii. Next quarter?
- iii. Next year?

Prepare a table of 12 entries. Write 1 line explanation of each of 12 choices.

Common Mistake: Not specifying all 12 combinations.

**Scan This to Download These Slides**



Raj Jain

<http://rajjain.com>

# Related Modules



CSE567M: Computer Systems Analysis (Spring 2013),

[https://www.youtube.com/playlist?list=PLjGG94etKypJEKjNAa1n\\_1X0bWWNyZcof](https://www.youtube.com/playlist?list=PLjGG94etKypJEKjNAa1n_1X0bWWNyZcof)

CSE473S: Introduction to Computer Networks (Fall 2011),

[https://www.youtube.com/playlist?list=PLjGG94etKypJWOSPMh8Azcg5e\\_10TiDw](https://www.youtube.com/playlist?list=PLjGG94etKypJWOSPMh8Azcg5e_10TiDw)



Wireless and Mobile Networking (Spring 2016),

[https://www.youtube.com/playlist?list=PLjGG94etKypKeb0nzyN9tSs\\_HCd5c4wXF](https://www.youtube.com/playlist?list=PLjGG94etKypKeb0nzyN9tSs_HCd5c4wXF)

CSE571S: Network Security (Fall 2011),

<https://www.youtube.com/playlist?list=PLjGG94etKypKvzfVtutHcPFJXumyyg93u>



Video Podcasts of Prof. Raj Jain's Lectures,

<https://www.youtube.com/channel/UCN4-5wzNP9-ruOzQMs-8NUw>